Using Lamport Clocks to Reason About Relaxed Memory Models*

Anne E. Condon, Mark D. Hill, Manoj Plakal, Daniel J. Sorin

Computer Sciences Department
University of Wisconsin-Madison
{condon,markhill,plakal,sorin}@cs.wisc.edu

*. This work is supported in part by Wright Laboratory Avionics Directorate, Air Force Material Command, USAF, under grant #F33615-94-1-1525 and ARPA order no. B550, National Science Foundation with grants MIP-9225097, MIPS-9625558, CCR 9257241, and CDA-9623632, a Wisconsin Romnes Fellowship, and donations from Sun Microsystems.

(c) 1999 Condon, Hill, Plakal, Sorin

Motivation & Problem

- Shared-memory multiprocessors must be correct!
- *Correct == Implementing a memory consistency model*
  - Most memory consistency models define correctness through (off-line) existence of a total/partial order on memory references
  - E.g., Sequential Consistency (SC) and TSO require a total order. Alpha requires a partial order.
- *Existence of required order is not evident*
- Modern high-performance implementations:
  - Cache coherence (e.g., snooping, directories)
  - Very aggressive (e.g., out-of-order processors, hierarchies of non-blocking caches, interleaved memories)
  - Optimizations $\Rightarrow$ memory operations re-ordered/non-atomic

(c) 1999 Condon, Hill, Plakal, Sorin

Our Proposal: Use Lamport Clocks

- Most consistency models require (off-line) existence of order
- Borrow from Lamport's logical clocks:
  - Assign timestamps to memory references in any execution
  - Prove that every load returns value written by previous store to same address in timestamp ordering
  - No hardware added!
- Since proof works for orderings created by any execution:
  - Every execution satisfies consistency model
  - *Therefore, system satisfies consistency model*

(c) 1999 Condon, Hill, Plakal, Sorin

Alternative Methods

- Informal Techniques:
  - Extensive simulation and stress testing
  - Thought experiments (a.k.a. hand-waving)
- Formal Techniques:
  - State-space search of finite-state coherence engines
  - Verification using theorem-provers
- Current promising research in formal systems:
  - Symbolic states [Pong & Dubois, SPAA'93]
  - Aggregation of transactions [Park & Dill, SPAA'96]
  - Term rewriting [Shen & Arvind]

Where Our Scheme Fits In

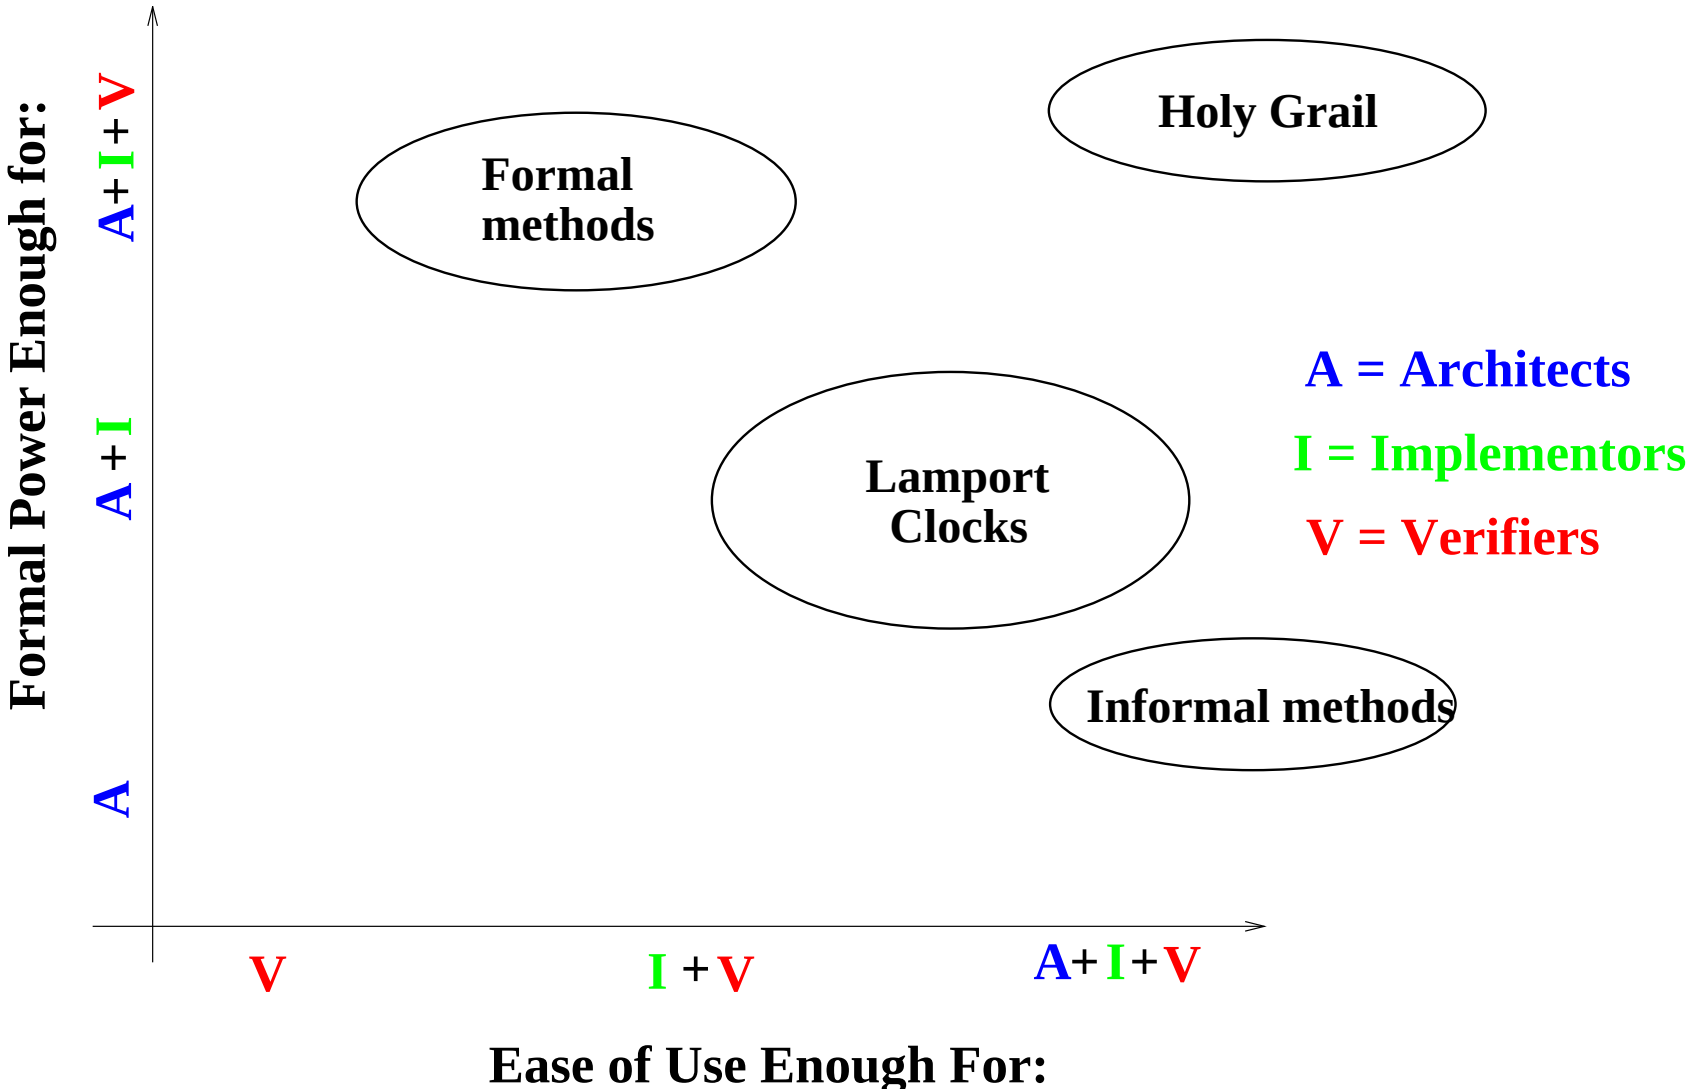

Outline

- Motivation, Problem & Summary
- *Background*
  - *Memory Consistency Models*
  - *Lamport Clocks*
- Our Verification Technique
- Summary

Memory Consistency Models

- SC is like multiprogrammed uniprocessor

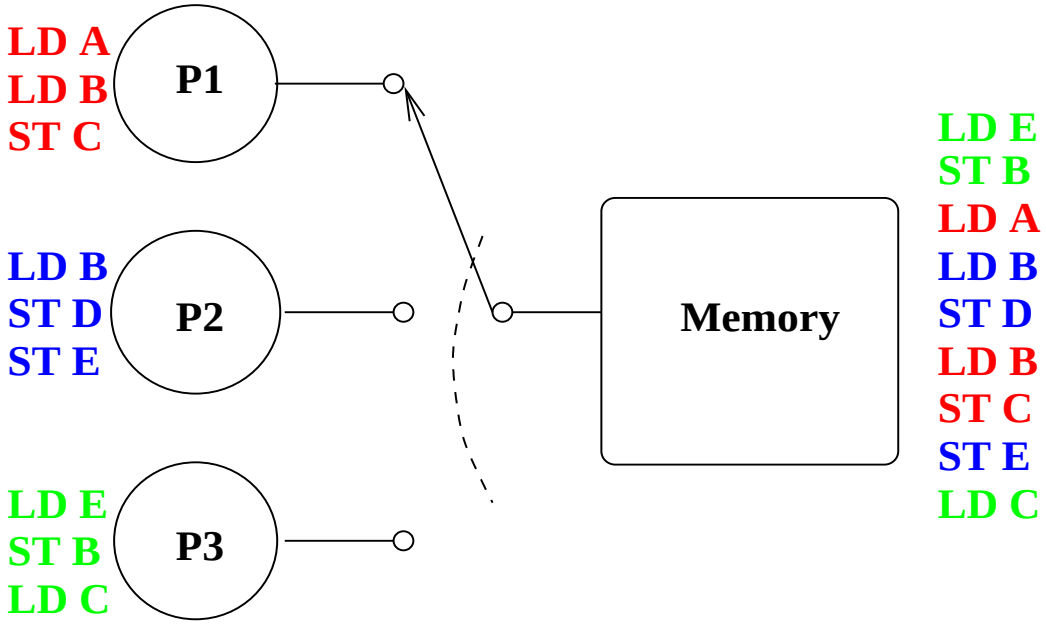

- For each execution
  - *There exists a total order*
  - That respects the *program order* of each processor
  - Loads return the *value of the last store* in that order

Memory Consistency Models (cont'd)

SPARC TSO - allows FIFO write buffers between CPU and cache

- For each execution
  - There exists a total order
  - That respects the program order of each processor
  - Loads return the value of the last store in that order *unless the store is in (an abstraction of) the write buffer*

COMPAQ Alpha - allow re-ordering between memory barriers

- For each execution
  - There exists a *partial* order
  - That respects *a subset of* program order of each processor
  - Loads return the value of the last store in that order

Directory Coherence Protocol Example

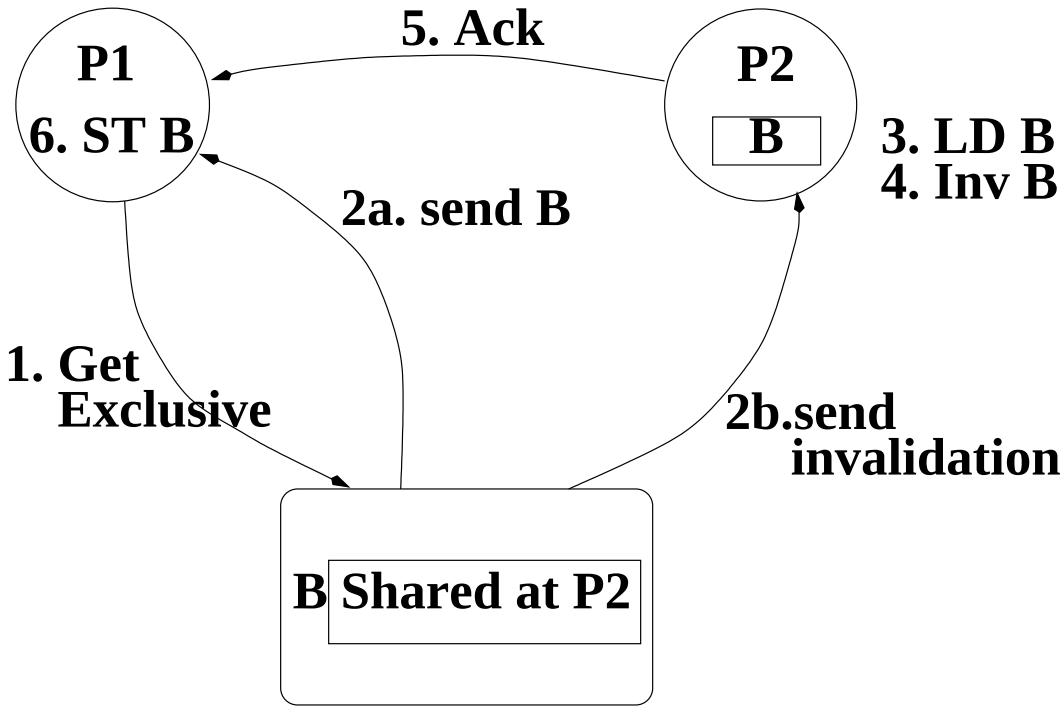

A Directory Protocol in action

- Events at a processor:
  - Memory operations (LD, ST)
  - Coherence transactions (Get-Exclusive, Invalidate)

Lamport Clocks (CACM, 1978)

- Problem: notion of “happens before” in a distributed system
- Solution: Use logical clocks (counters) at each node
- Update clocks respecting causality and real-time local order

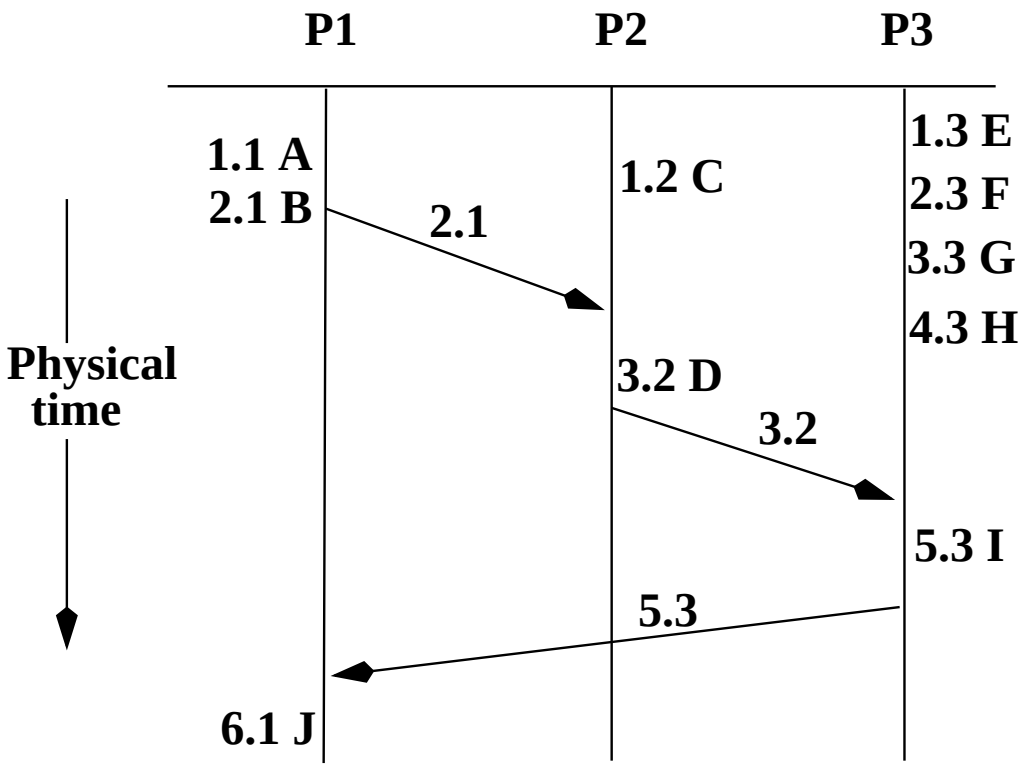

Logical order

1.1	A
1.2	C
1.3	E
2.1	B
2.3	F
3.2	D
3.3	G
4.3	H
5.3	I
6.1	J

Outline

- Motivation, Problem & Summary
- Background
- *Our Verification Technique*
  - *Our extensions to Lamport's solution*
  - *Applying our technique*
  - *Case study of SC system*
  - *Extending technique to other memory models*
- Summary

Lamport Clocks

- Why not reason about correctness by:
  (1) Think of every dynamic load/store getting a timestamp
  (2) Have memory hand out the timestamps
  (3) Show every load returns an appropriate value

- Can do (1) and (3), *but real implementations can't do (2)*
  - Don't have a single physical memory
  - Often have distributed coherent caches

Comparing Our Solution to Lamport's Solution

	Lamport's Solution	**Our Solution**
Timestamp	Local Events and Messages	Memory Operations and Coherence Transactions
Logical Clock	2-tuple	3-tuple
Increment	Local Events (in real-time order)	Loads/Stores (in program order)
Update	Message Receives	Coherence Message Receives
Break Ties	Node ID	Node ID

(c) 1999 Condon, Hill, Plakal, Sorin

A (brief) Case Study: A Directory Protocol

- SC system using an SGI Origin 2000-like invalidation-based directory protocol:

- How we timestamp Loads/Stores:
  - Loads/Stores are *bound* to the coherence transactions that ensured the appropriate coherence state

  - Global time = max(global time of transaction to which load/store is bound,
    global time of previous load/store in program order)

  - Local time = 1 + local time of previous load/store in program order with same global time,
    1, if this is the first.

Case Study (contd)

- Example of timestamping at a single node:

Physical time		Lamport time
Get- Exclusive A	1.0.1	Get-Exclusive A
LD A	1.1.1	LD A
Get-Shared B	1.2.1	ST A
ST A	2.0.1	Get-Shared B
LD B	2.1.1	LD B

Example of timestamping across nodes:

Physical Time			Lamport Time	
N_1	N_2		N_1	N_2
send GETX A	store B	1.10.2		store B
	bind load A	1.11.2		load A
	recv INV A send ack	2.0.2		invalidate A, send ack
recv ACK	perform load A, invalidate A	3.0.1	recv ACK	
store A		3.1.1	store A	

TSO

- For each execution
  - There exists a total order
  - That respects the program order of each processor
  - Loads return the value of the last store in that order *unless the store is in (an abstraction of) the write buffer*

- *Wisconsin TSO*
  - Break up store into Store-Private and Store-Public
    - Store-Private to write buffer
    - Store-Public to cache
  - Loads return the value of the last Store-Public or the value of the last Store-Private if the Store-Private is at that processor.
  - TSO proof done for SC protocol with added FIFO write buffer

(c) 1999 Condon, Hill, Plakal, Sorin

Alpha

- For each execution
  - There exists a *partial* order
  - That respects *a subset of* the program order of each processor
  - Loads return the value of the last store in that order

- *Wisconsin Alpha*
  - Partial order only respects
    - order between references to the same address
    - memory barriers
  - Arbitrarily create a total order out of the partial order
  - Loads return the value of the last store in this total order
  - Alpha proof done for SC protocol with coalescing write buffer

(c) 1999 Condon, Hill, Plakal, Sorin

Summary

- Memory consistency model requires (off-line) existence of order
- Construct order on-line by assigning *timestamps*
- Prove requirements of model in constructed order
- Since proof works for any execution:
  - Every execution is correct
  - *Therefore, system is correct*
- In our view
  - Ease of use: Formal Verification < Lamport < Informal
  - Formal Power: Informal < Lamport < Formal Verification

Future Work

- Other memory systems (clusters of SMPs)
- Systems with I/O
- Handling deadlock, starvation, & live-lock
- A good way of formally specifying protocols
- Automating the whole process (thereby losing our jobs)